


## Válvula de Diafragma Retenção

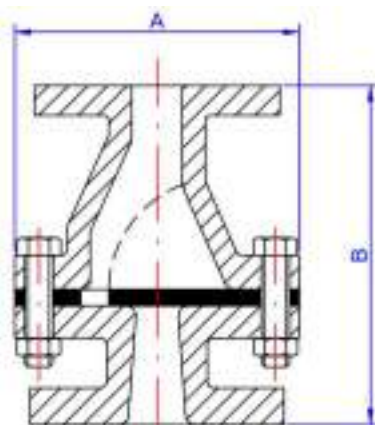

Dimensão "C"										
Conexão	1"	1.1/2"	2"	3"	4"	6"	8"	10"	12"	14"
Flange s/ revest.	157	183	202	265	355	406	521	635	749	822
Flange revest. Borracha	161	187	206	269	359	410	524	639	753	826
Tolerância "B" +/-	2	2	2	3	3	3	3	3	3	3
Dimensão "A"	130	145	155	210	240	300	400	475	608	634
Peso (Kg) - Flange	6,0	10,0	16,0	23,0	38,0	55,0	108,0	230,0	264,0	280,0

Pressão máxima de trabalho para comando manuais.										
Material	1"	1.1/2"	2"	3"	4"	6"	8"	10"	12"	14"
Borracha	7	7	7	7	7	7	7	7	7	7

Diafragma		
Material	Temperatura C°	Código
Borracha natural	70	X
Butil	100	B
EPDM	120	D
EPDM-150	150	DS
Hypalon	100	H
Neoprene	100	N
Nitrílica	120	L
Viton	150	V

Corpos		
Material	Temperatura C°	Código
FF (Ferro fundido)	140	
FF/Vidro	140	
FF/Hallar	140	
FF/Ebonite	90	E
FF/Butil	100	B
FF/Borracha natural	80	X
FF/Neoprene	100	N
FF/ETFE	120	

