



Válvula de diafragma sanitária três vias com atuador manual.



Bitola	A	B	C	D
1" x 1/2"	127,0	103,0	95,0	80,0
1" x 3/4"	127,0	130,0	95,0	80,0
1.1/2" x 1/2"	159,0	133,0	130,0	90,0
1.1/2" x 3/4"	159,0	133,0	130,0	90,0
1.1/2" x 1"	159,0	133,0	130,0	105,0
2" x 1/2"	191,0	152,0	130,0	110,0
2" x 3/4"	191,0	152,0	130,0	110,0
2" x 1"	191,0	152,0	130,0	120,0
2.1/2" x 1/2"	216,0	194,0	170,0	150,0
2.1/2" x 3/4"	216,0	194,0	170,0	150,0
2.1/2" x 1"	216,0	194,0	170,0	170,0

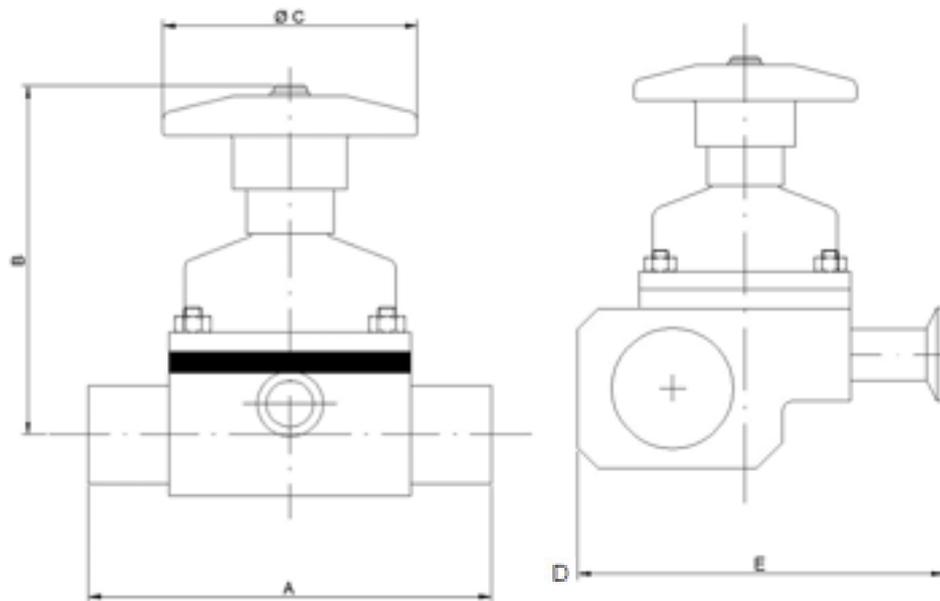

Pressão máxima de trabalho para comando manuais.							
Material	1/4"	1/2"	3/4"	1"	1.1/2"	2"	2.1/2"
Borracha	14,0	14,0	14,0	14,0	14,0	14,0	12,0
PTFE	-	10,0	10,0	10,0	10,0	10,0	10,0

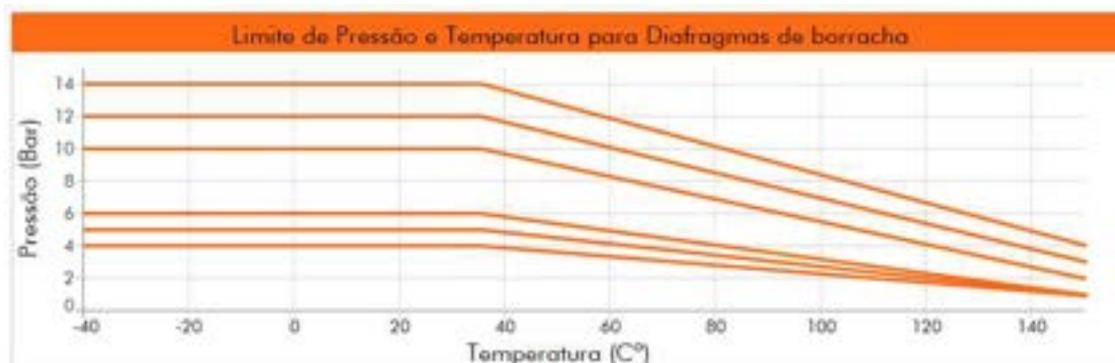

Diafragma		
Material	Temperatura C°	Código
EPDM 150	150	DS
PTFE/EPDM 150	160	PD
PTFE/Viton	160	PV
Viton	160	V
Silicone	160	S

Corpos	
Materiais Aço Inox 316/316L 304/304L	Laminado
	Micro Fundido
	Forjado
Outras Ligas sob Consulta	